
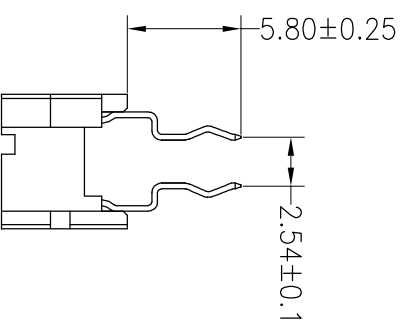
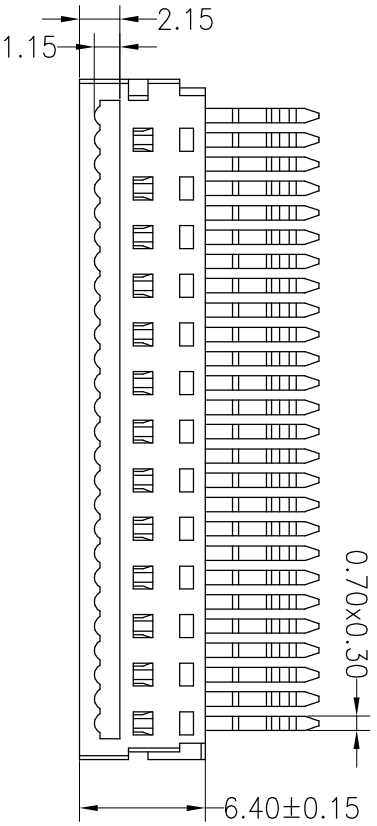


HSP ROHS

SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze
 Contact Plating:Tin Plated
 Applicable Wire:26AWG and 28AWG
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

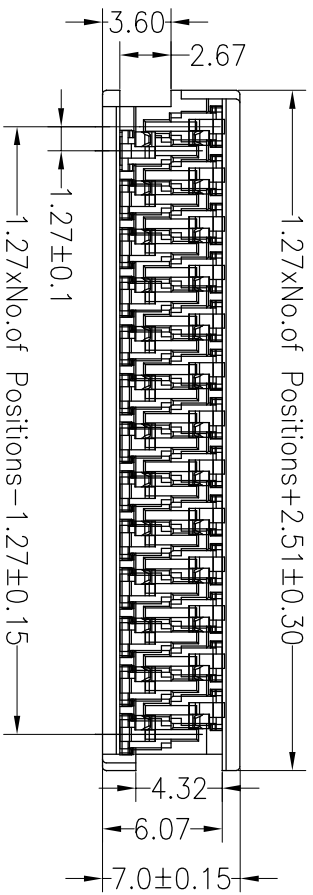


Ordering Information

4100 XX F D XX AN X 01

No. of Pins: 06~26P
 Contact Plating: SN: Tin, SM: Matte-Tin, Ni: Ni
 Packing: T=Tube, A=Tray

Recommended PCB Layout

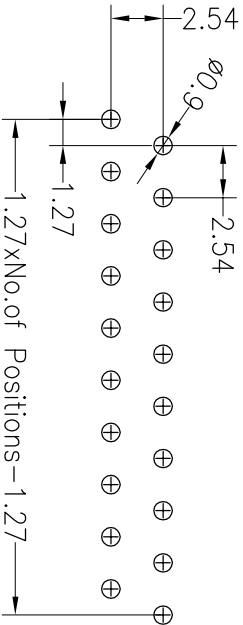

OPERATION		DRAW		BEN		SCALE		FIT	
XX	±0.30	XX	±0.30	16.12.10	UNIT	mm	A4	1/1	
X:XX	±0.20	CHECK			SIZE	A4			
X:XXX	±0.10				SHEET	1/1			
Angle	±3°	APPROVE			PROU.				
DIM	TOL								

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2016.12.10	NEW DRAWING	
1			

PART NO.		4100XXFDXXANX01
TITLE:		1.27 White IDC-Type Female DIP



深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892