







SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

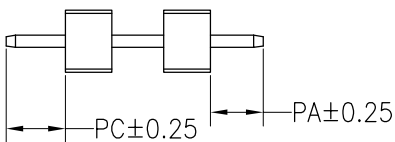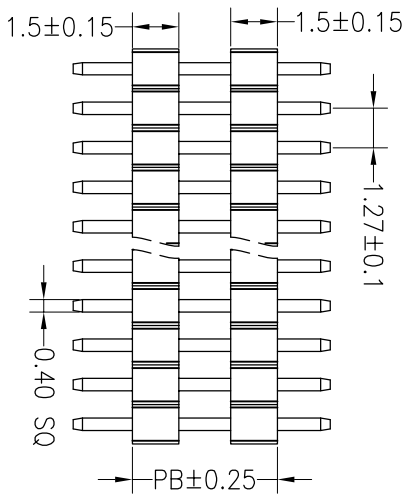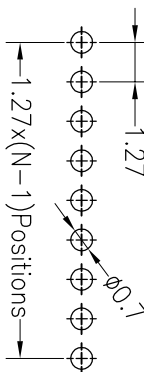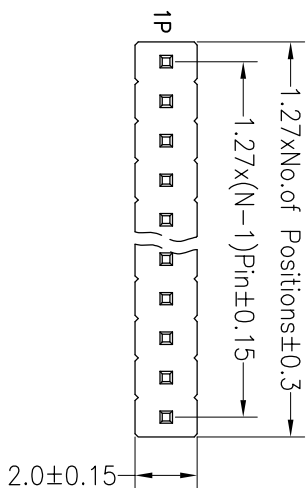

Ordering Information

141521 XX X N XX S XXX X02

No.of Pins Per Row 1*1~1*50
 Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
 Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin
 Pin Length
 Packing
 0=PE Bog
 A=Troy
 T=Tube

Dimension antitheses list					
ITEM	PA	PB	PC	L	
Standard	1.80	3.00	3.00	7.80	
Alternate					

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	Yyusheng	16.05.03	UNIT	mm	A4	1/1	141521XXXXXXSXXXX02	
X.XX	±0.20	CHECK		SIZE	A4			1.27PH 1xNPin H1.5+H1.5mm 180°	
X:XXX	±0.10	APPROVE		SHEET	1/1				
Angle	±3°			PROJ.					
DIM	TOL								
CHANGE		DRAW		SCALE		FIT		PART NO.	
1	2	3	4	5	6	7	8	1.27PH 1xNPin H1.5+H1.5mm 180°	

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892