

# HSF RoHS

## SPECIFICATIONS

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze/Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)





## Ordering Information

3811 - 95 01 O XX B 01

Plastics  
 Height  
 95±9.5mm

Contact Plating  
 G0:Gold Flash  
 G1:3U" Gold  
 G2:5U" Gold  
 G3:10U" Gold  
 G4:15U" Gold  
 G5:30U" Gold  
 S0:Gold Flash/Tin  
 SN:Tin

Color Type  
 B=Black  
 U=Blue  
 R=Red  
 W=White  
 Y=Yellow

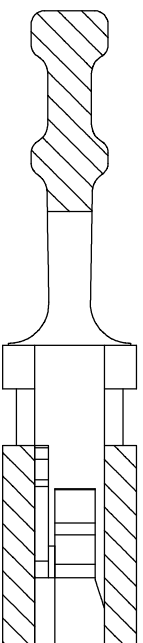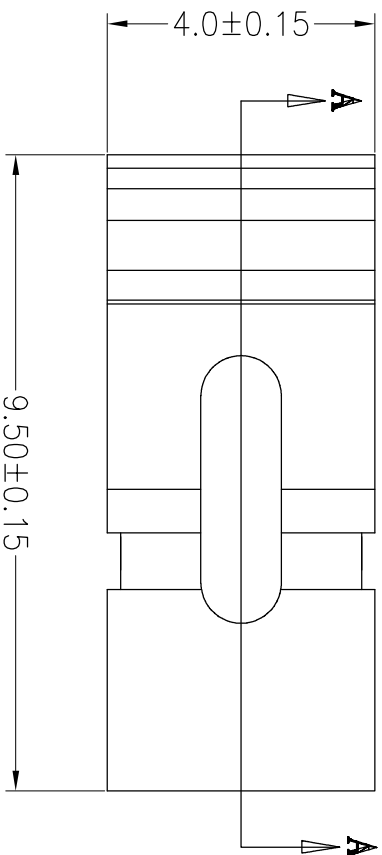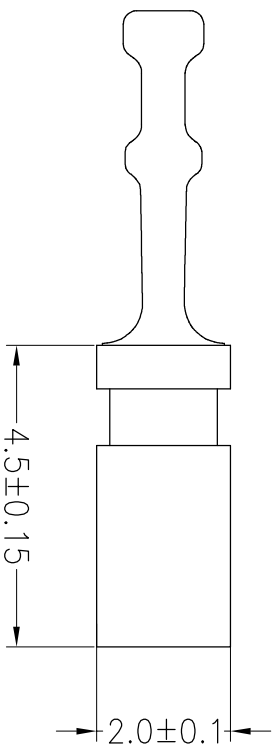

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	BEN	15.01.28	SCALE	FIT	SHEET	1/1	PROU.	TITLE:
				Angle	TOL				UNIT	mm				
A0	2015.01.28	NEW DRAWING		X.XX	±0.30	CHECK			A4					PART NO. 381195010XXB01
1														2.00 Mini Jumper 1*2Pin

**JINL** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992