

HSE ROHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C




Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

注: 带有序号为重点管控尺寸

Ordering Information

3810 65 01 C XX X 01

Plastics Height 65=6.5mm
 No. of Pins 01=Sing Type
 Contact Plating
 G1: 1U" Gold
 G2: 1.5U" Gold
 G3: 2U" Gold
 G4: 3U" Gold
 G5: 5U" Gold
 NO: 1U" Gold/Ni
 Ni: Ni
 Color Type
 B=Black
 U=Blue
 R=Red
 W=White
 Y=Yellow

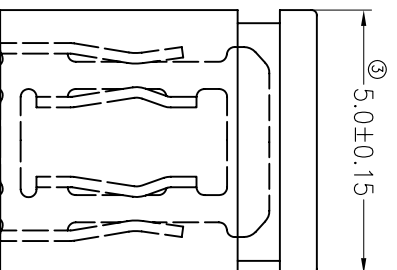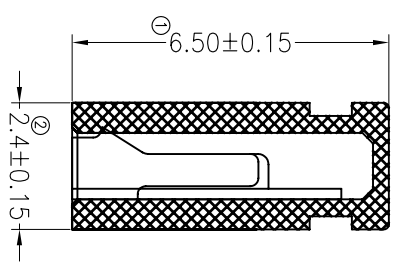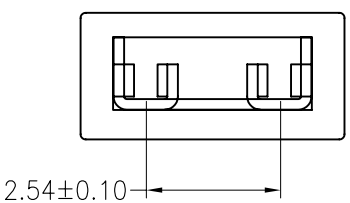

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	YHUSheng	12.04.18	UNIT	mm	A4	1/1	38106501CXXX01	
X.XX	±0.20	CHECK		SIZE	A4	1/1			
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								
CHANGE									
MODIFICATION DESCRIPTION									
DATE									
REV									
A0	2012.04.18	NEW DRAWING							
1									

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

TITLE: 2.54 Mini Jumper 1*2Pin Close Type