



**SPECIFICATIONS**

Rated Current: 1.5AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°c to +105°c

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester(UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)

# Ordering Information





1320 11 XX X N XX R XXX X 01

No. of Pins Per Row 1x40  
 1--40

Insulator Material Option  
 A=BK-PBT  
 C=BK-PA6T  
 D=BK-PA46  
 E=BK-PA9T  
 F=BK-LCP

Contact Plating  
 G0:Gold Flash  
 G1:1U" Gold  
 G2:1.5U" Gold  
 G3:2U" Gold  
 G4:3U" Gold  
 S0:Gold Flash/Tin  
 SN:Tin

Pin Length  
 Packing  
 O=PE Bag  
 A=Troy  
 T=Tube  
 P=Tube+Cap  
 R=Reel+Cap  
 M=Reel+Mylar

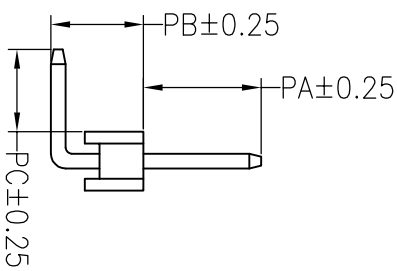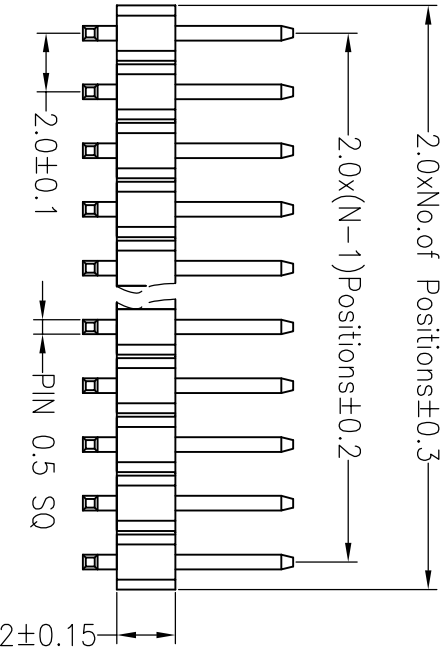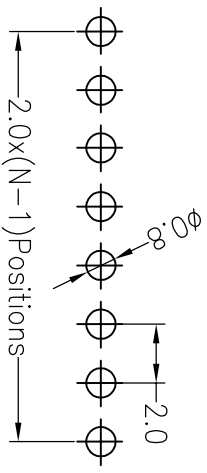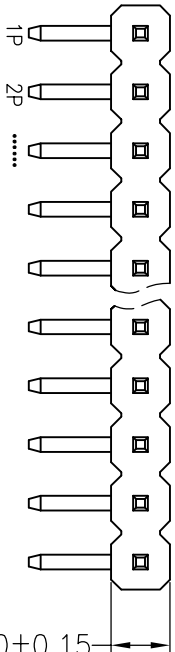

Dimension antitheses list					
ITEM	PA	PB	PC	L	
Standard	4.00	3.15	2.80	10.50	

**JILIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

OPERATION		DRAW		SCALE		FIT		PART NO.	
DIM	TOL	YU	SHENG	UNIT	mm	PROJ.	1/1	1320-11XXXXXX	XXXXX01
X.X	$\pm 0.30$		12.10.10						
X.XX	$\pm 0.20$	CHECK							
X.XXX	$\pm 0.10$								
Angle	$\pm 3^\circ$	APPROVE							

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	TITLE:
A0	2012.10.10	NEW DRAWING			2.0PH 1XNpin H2.0mm Single 90°
1					