

SPECIFICATIONS





Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

Ordering Information

2285 02 XX X N XX R Y X 01

- No. of Pins: 2*2~2*40
- Insulator Material Option:
 - A=BK-PBT
 - B=BK-PA66
 - C=BK-PA6T
 - D=BK-PA46
 - E=BK-PA9T
 - F=BK-LCP
- Contact Plating:
 - G0: Gold Flash
 - G1: 1U" Gold
 - G2: 1.5U" Gold
 - G3: 2U" Gold
 - G4: 3U" Gold
 - G5: 5U" Gold
 - S0: Gold Flash/Tin
- Packing:
 - 0=PE Bag
 - A=Troy
 - T=Tube
 - P=Tube+Cap
 - R=Reel

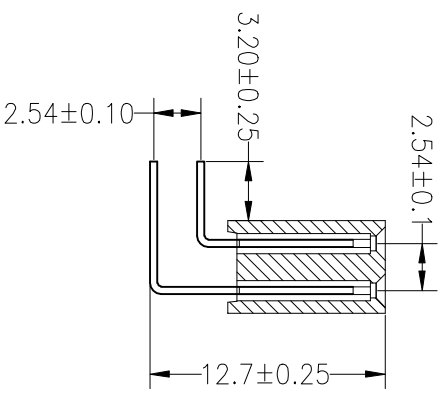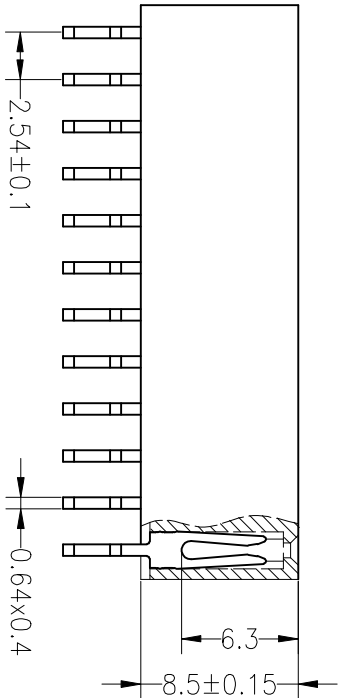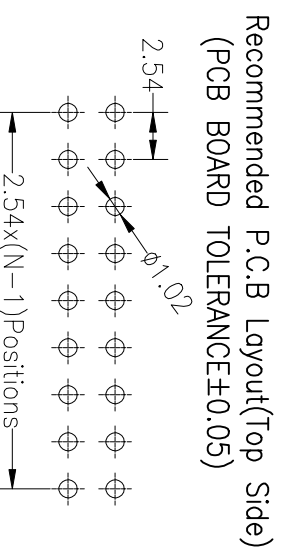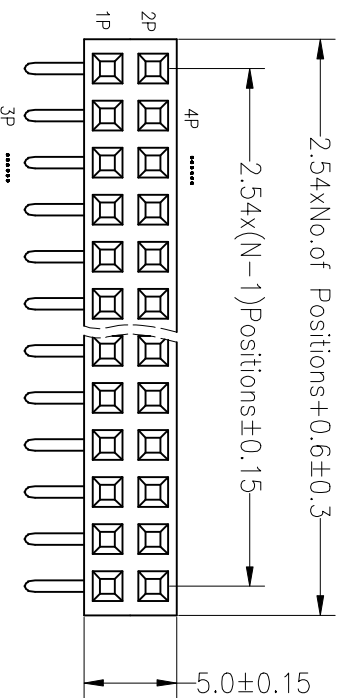

A	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DRAW	YH/Sheng	12.03.28	SCALE	FIT	PART NO.	TITLE:	
	A0	2012.03.28	NEW DRAWING				APPROVE		CHECK			UNIT			mm
B	OPERATION														
C	DRAW														
D	YH/Sheng 12.03.28														
E	SCALE														
F	FIT														
G	UNIT														
														mm	
														SIZE	A4
														SHEET	1/1
														PROL.	
														PROL.	
														PART NO.	228502XXXXXXRYX01
														TITLE:	2.54PF H8.5mm 2XNpin 90°
														DATE	L12.7/17.7mm

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-8806/8802 Fax: 86-755-2997-8992