
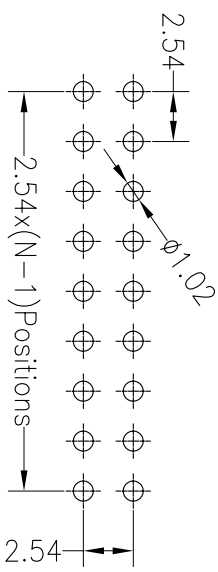


**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au Or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT  
 Max. Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

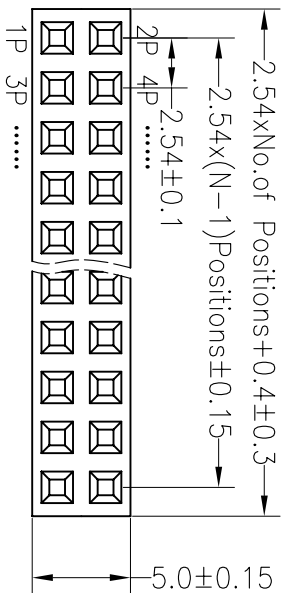

**Ordering Information**

2285 02 XX X N XX S Y X 0X

No. of Pins Per Row: 2\*40  
 Insulator Material Option:  
 A=BK-PBT  
 B=BK-PA66  
 C=BK-PA6T  
 D=BK-PA46  
 F=BK-LCP  
 Contact Plating:  
 G1:1U" Gold  
 G2:1.5U" Gold  
 G3:2U" Gold  
 G4:3U" Gold  
 G5:5U" Gold  
 S0:Gold Flash/Tin  
 SN:Tin  
 Packing:  
 O=PE Bog  
 A=Troy  
 T=Tube  
 P=Tube+Cap  
 R=Reel+Cap  
 M=Reel+Mylar

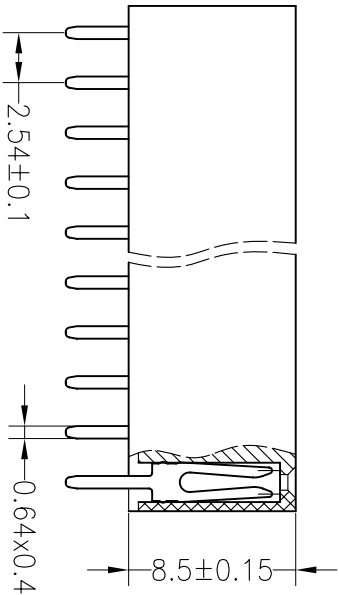

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YYSsheng	12.03.28	SCALE		FIT	SHEET	PART NO.	TITLE:
				Angle	±3°				UNIT	mm				
A0	2012.03.28	NEW DRAWING		X.X	±0.30									
				X.XX	±0.20	CHECK								
				X.XXX	±0.10									
				DM	TOL	APPROVE								

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

228502XXXXXXSY0X  
 2.54PF H8.5mm 2XNpin 180° W5.0mm