



FILE NO.:E92810

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass


Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

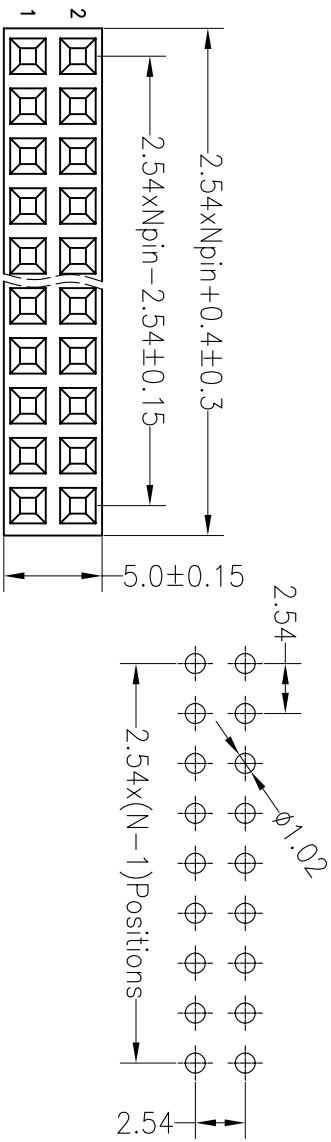

Ordering Information

2211 02 XX X N XX S Y X 01

- No. of Pins Per Row 2x40
- Insulator Material Option: A=BK-PBT, B=BK-PAG6, C=BK-PAGT, D=BK-PAG6, E=BK-PAGT, F=BK-LCP
- Contact Plating: G1:Gold Flash, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold
- Packing: 0=PE Bog, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar
- SN: Tin
- SO: Gold Flash/Tin

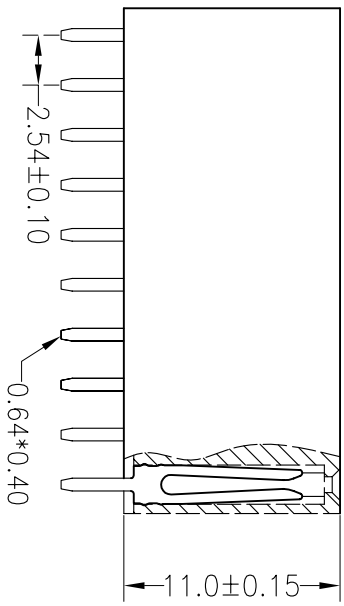

OPERATION	X.X	±0.30	DRAW	YHUSheng	12.03.28	SCALE	FIT	UNIT	mm
	X.XX	±0.20							
Angle	X.XXX	±0.10	APPROVE			SIZE	A4	SHEET	1/1
	DM	±3°							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE						
A0	2012.03.28	NEW DRAWING							
1									

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO. 221102XXXXXXSY01
 TITLE: 2.54PF H11.0mm 2xNpin 180° W5.0mm