



HSF ROHS

SPECIFICATIONS



Current Rating: 3.0 Amps
 Withstanding Voltage: AC 500V
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Operation Temperature: -40° C to +105° C
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Contact Material: Brass
 Contact Plating: SN over 50μ" Ni
 Max. Processing Temp: 230° C for 30-60 seconds
 (260° C for 5 seconds)

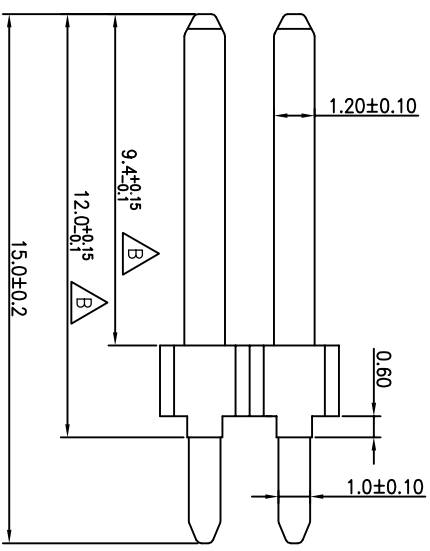

Ordering Information

8100 02 S SM B 001

No. of Pins Per Row: 02=2P
 Contact Plating: SM=Matte Tin
 Colour: B=Black

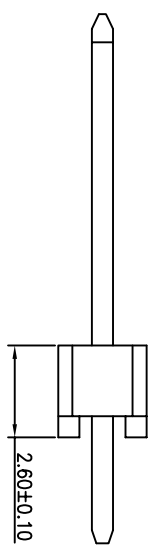

P.C.B LAYOUT

		更改尺寸公差: 9.4±0.1, 12.0±0.1				OPERATION		DRAW		Y.YuSheng		18.11.06		SCALE		FIT		JILIN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992			
B		2018.11.06		9.4 ^{+0.15} , 12.0 ^{+0.15}		X.X ±0.30		CHECK		UNIT		mm		SIZE		A4				PART NO.	
A		2015.09.01		NEW DRAWING		X.XXX ±0.10		APPROVE		SHEET		1/1		PROJ.		1/1				8100-02SSMB001	
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		DIM		TOL		ANGLE		±3°				TITLE:		2Pin H2.6 转向灯直插插座	
1		2		3		4		5		6		7		8		9					