



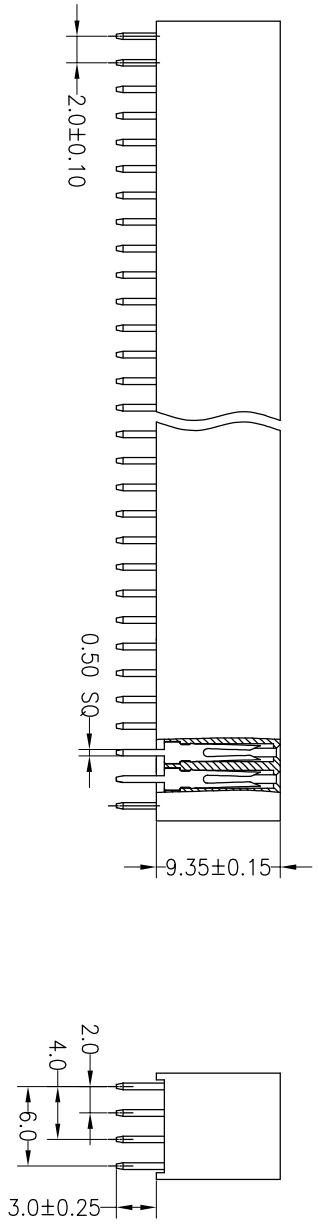

**SPECIFICATIONS**

Rated Current: 1.5AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°c to +105°c

Contact Material: Phosphor bronze  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)

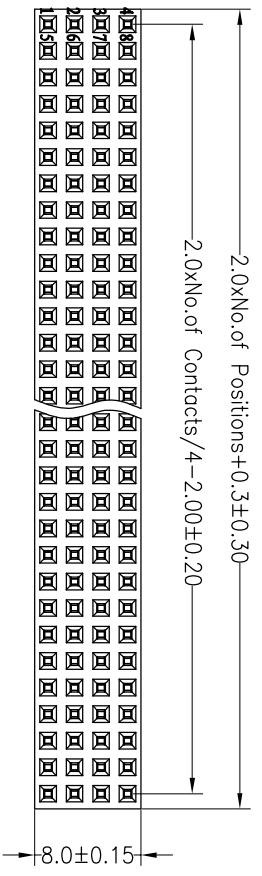


**Ordering Information**

**2393 04 XX X N XX SY X 03**

No. of Pins Per Row: 4x1 ~ 4x40  
 Insulator Material Option:  
 A=BK-PBT  
 B=BK-PA66  
 C=BK-PA6T  
 D=BK-PA46  
 E=BK-PA6T  
 F=BK-LCP  
 Contact Plating Option:  
 G0:Gold Flash  
 G1:3U" Gold  
 G2:5U" Gold  
 G3:10U" Gold  
 G4:15U" Gold  
 G5:30U" Gold  
 S0:Gold Flash/Tin  
 SN:Tin  
 Packing T=Tube

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ± 0.05)

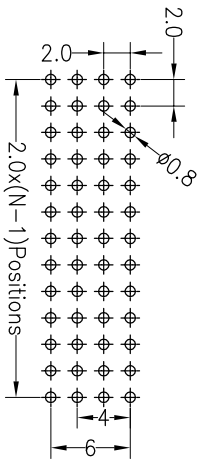

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	YYuSheng	15.04.18	UNIT	mm	A4	1/1	239304XXXXXXSYX03	
X.XX	±0.20	CHECK		SIZE	A4	SHEET		2.00PF H9.35mm 4xNpin 180° PC3.0mm	
X.XXX	±0.10	APPROVE		PROU.	1/1	TITLE:			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			
1	2015.04.18	NEW DRAWING							

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892