



HSF RoHS

SPECIFICATIONS PERFORMANCE



Electical Rating: AC/DC 50V 0.5A
 Contact Resistance: 80mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstand Volt: 500V AC/minute
 Opratng Temperature: -40°C to +105°C

Material

Contact: Phosphor Bronze Gold-Plated
 Housing: LCP UL94V0
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

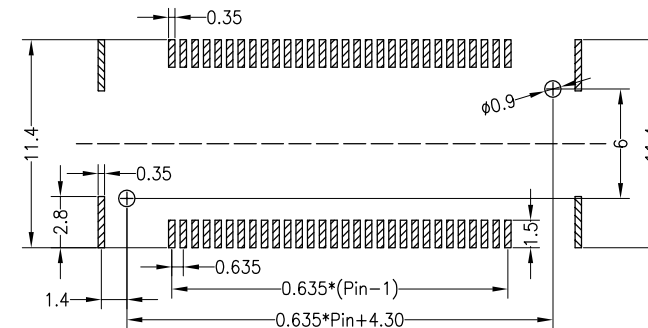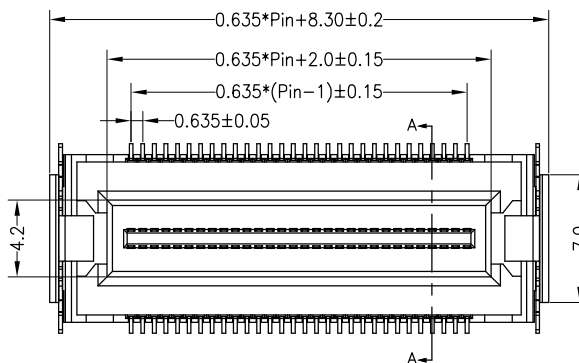



P.C.B Layout

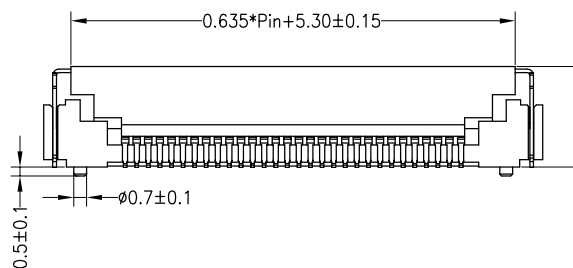

Ordering Information

3724 F XXX 055 XX X X 01

F=Female M=Male	No. of pins 20P~100P	Plastic Hight 055=5.5mm	Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold S0:1.5U" Gold/Tin S1:3U" Gold/Tin	Insulator Material Option D=BK-PA46 E=BK-PA9T F=BK-LCP	Packing T:Tube R:Reel M:Reel+Mylar
--------------------	-------------------------	----------------------------	--	---	---

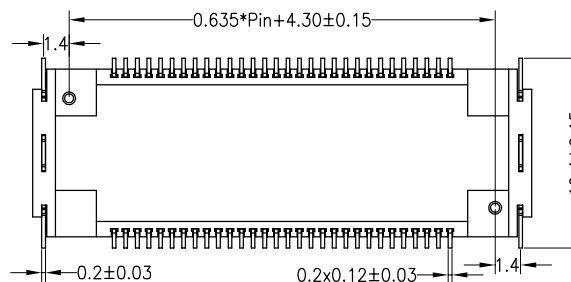

OPERATION		DRAW	yiyusheng	20.09.03
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

A0

2020.09.03 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION CHANGE

PART NO. 3724FXXX055XXXX01

TITLE: 0.635mm 浮动式BTB NPin H5.5 Female