
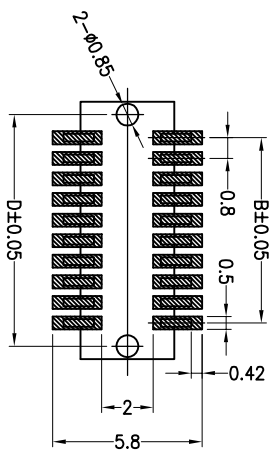







HSE ROHS

SPECIFICATIONS PERFORMANCE

Electrical Rating: AC/DC 50V 0.5A
 Insulation Resistance: 500M Ω
 Withstang Volt: 200V AC/minute
 Oprating Temperature: -40°C to +105°C
 Material
 Contact: Phosphor Bronze Gold-Plated
 Housing: PA9T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)



RECOMMENDED PCB PATTERN DIM.
 TOLERANCE : ±0.05



Ordering Information

3710 F XXX 049 XX X X 01

F=Female
 M=Male
 No.of pins 4-52P
 Plastic Height 049=4.90mm
 Contact Plating GG:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 Insulation Material E= PA9T
 F= LCP
 Packing T:Tube
 R:Reel

No. of contacts	Dimensions			
	A	B	C	D
4	3.60	0.80	2.40	2.60
6	4.40	1.60	3.20	3.40
8	5.20	2.40	4.00	4.20
10	6.00	3.20	4.80	5.00
12	6.80	4.00	5.60	5.80
14	7.60	4.80	6.40	6.60
16	8.40	5.60	7.20	7.40
18	9.20	6.40	8.00	8.20
20	10.00	7.20	8.80	9.00
22	10.80	8.00	9.60	9.80
24	11.60	8.80	10.40	10.60
26	12.40	9.60	11.20	11.40
28	13.20	10.40	12.00	12.20
30	14.00	11.20	12.80	13.00
32	14.80	12.00	13.60	13.80
34	15.60	12.80	14.40	14.60
36	16.40	13.60	15.20	15.40
38	17.20	14.40	16.00	16.20
40	18.00	15.20	16.80	17.00
42	18.80	16.00	17.60	17.80
44	19.60	16.80	18.40	18.60
46	20.40	17.60	19.20	19.40
48	21.20	18.40	20.00	20.20
50	22.00	19.20	20.80	21.00
52	22.80	20.00	21.60	21.80

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

3710FXXX049XXEX01

0.80BTH H4.9mm NPin Female Angle

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.
A0	2021.06.05	NEW DRAWING		X.X ±0.30	luojun	mm	A4	
				X.XX ±0.20	CHECK			
				X.XXX ±0.10				
				Angle ±3°	APPROVE			
				DIM				
				TOL				